

Intumex® LW - Fire prevention seal

General

Intumex® LW is an intumescent seal with a starting temperature of approx. 300°C, which creates no pressure on expansion and multiplies its volume.

Area of application

Intumex® LW is an intumescent seal for glazings.

Properties

- ⇒ Creates no pressure on expansion
- ⇒ Excellent isolation
- ⇒ Free of organic solvents and halogen



Technical Data

Colour	Light grey
Appearance	Flexible seal
Density	1.35 ±0.3g/cm ³
Weight	2.4 ±0.24kg/m ²
Reaction to fire	B2, normal combustible
Expansion temperature	approx. 300°C
Expansion ratio	approx. 1:28 – 1:40 (unloaded)
Thorn flexibility	<10mm (20°C)


Above indicated data of expansion ratio and pressure are taken from the DIBT building material approval. The actual expansion ratio as well as the generated expansion pressure are essentially depending on the fire test of the assembly and also on the joint dimensions of the construction itself.

Test certificate / Approval

- ⇒ on request

Additional test approval

- ⇒ Thermal conductivity: 0,303 W/(mK) (MPA Hannover)

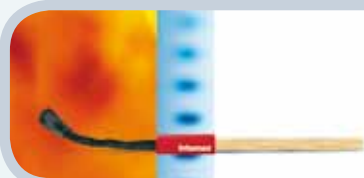

Intumex® LW - Fire prevention seal

Packaging

- ⇒ Product variations: LWSK – intumescent seal with self adhesive foil = standard
- ⇒ Thickness: 1.2 mm and 2.0mm including self adhesive foil (tolerances: 1.2mm: 0.2/-0mm; 2.0mm: ± 0,18 mm without protective liner)
- ⇒ Coil dimensions: width: 10 to 200mm (tolerances width: +0.1/-0.5mm)
length: 50m: up to 14mm width or
100m: over 15mm width
(Carton core – diameter 150mm)
- ⇒ Packaging: in bulk on pallet

Other product dimensions and variations on request!
Subject to change!

Storage requirements

- ⇒ Store in cool and dry conditions
- ⇒ Protect from frost and heat
- ⇒ Product variations with self adhesive foil are stockable up to 12 months

Safety instructions

- ⇒ Keep out of reach of children
- ⇒ Avoid contact with food or beverages
- ⇒ Please refer to the safety data sheet for additional advice